


SPLITCH

Technical sheet

HDMI connection on the projector/beamer is required for video transmission

Monitoring via in ear 2x mono

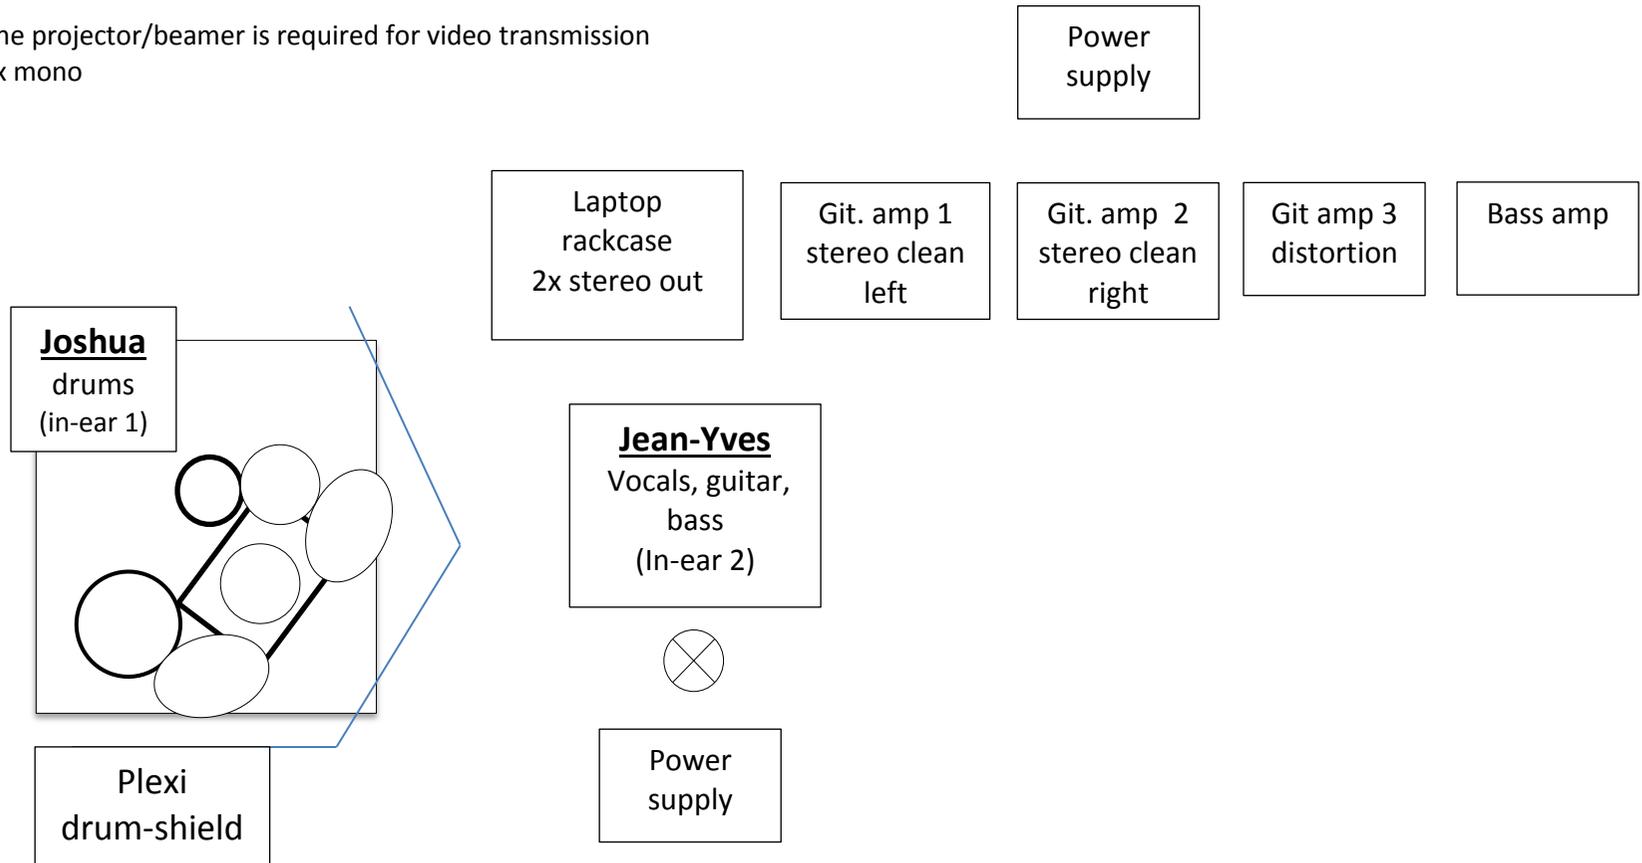

Patch

	INSTRUMENTS	MICROS	INS.	MONITORING	
1	KICK drum	Beta 91	gate	To in-ear 1 & 2	
2	SNARE	SM57	gate		
3	TOM 1	E604	gate		
4	FLOOR TOM	E604	gate		
5	HI-HAT	KM184, SM57			
6	OH left	KM184, C451, SE300		To in-ear 1 & 2	
7	OH right	KM184, C451, SE300		To in-ear 1 & 2	
8	Git. amp 1	SM57, Sennheiser 421		To in-ear 1 & 2	
9	Git. amp 2	SM57, Sennheiser 421		To in-ear 1 & 2	
10	Git. amp 3	SM57, Sennheiser 421		To in-ear 1 & 2	
11	Bass amp	Sennheiser 421		To in-ear 1 & 2	
12	Lead vocal	Beta 58 or SM58	Comp, reverb	To in-ear 1 & 2	
13	Computer Sound fx left (to P.A.)			To in-ear 1 & 2	
14	Computer Sound fx right (to P.A.)			To in-ear 1 & 2	
15	Computer click monitor left			To in-ear 1 & 2	NOT SEND TO P.A. FRONT
16	Computer click monitor right			To in-ear 1 & 2	NOT SEND TO P.A. FRONT